
## MAGNETIC BACKED ENGINEERED TIMBER OVERLAY



The mark of responsible forestry



Innovation meets elegance, the beauty of Attiro Vita is the simplicity with which you can create an engineered timber floor whilst retaining access to the underfloor void created. Vita benefits from powerful magnetised strips that are bonded to the underside of the timber planks which in turn adhere to the steel encapsulated floor panels. With a genuine oak veneer available in three standard finishes, you never have to compromise on style or function again.

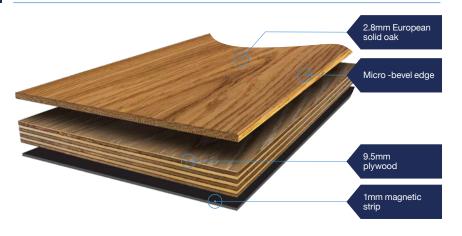

Staves	
Thickness:	13.3mm Nominal
Widths:	150mm
Lengths:	1400 - 1700mm random lengths
Surface finish <sup>+</sup> :	Hard wax oil onto 'brushed' surface
Category: Magnetic dry lay	

Performance	
Slip resistance:	Dry: >60PTV Wet: >45PTV

Magnetic Performance	
Magnet type:	Isotropic Flexible Ferrite
Wi-Fi interference:	Tested and approved
Electrical equipment:	Tested and approved incl. pacemaker & telephony devices

Panel Fire Performance	
Reaction:	EN1350

All genuine timber floor products (including Attiro Vita) require a relative humidity level of 40% to 60% to be maintained throughout the building

+ Additional colours & custom finishes available for projects >500m2. Please request further information.

Non-magnetic tongue-and-groove option available for areas without the raised access floor panels, i.e. screeded areas etc. for continuity of floor finish. All colour surface finishes available. Please contact Technical for dimensions.

## Raised access floor interface

Tolerance: 0.75mm maximum height difference between adjancent raised access floor panels.

Designed for use with Tate access floor systems.



## **Expansion Joints**

8mm expansion joints every 15m width and every 35-45m in length. Colour matched 8mm factory formed silicone material. 8-10mm expansion to be included for all perimeter adjustments.



Sbiancato

lease contact Technical for dimensions.

