
# 38Bs-DB

## **ELEMENT CLASS 5**

The Tate Caso raised access floor system consists of high-quality floor panels with a highly compressed gypsum fibre core and a circumferential edge protection banding. A steel sheet is applied to the underside of the panel, which contributes to increasing the load-bearing capacity. In conjunction with an appropriately sized substructure, this raised floor system achieves the technical values described below.

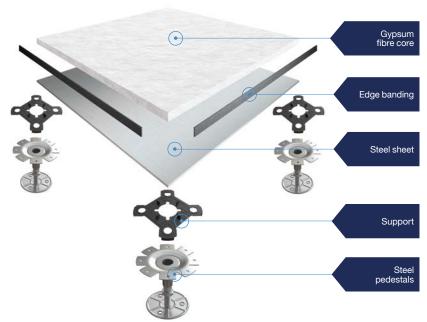

| Panels                  |   |
|-------------------------|---|
| Thickness               | approx. 38.5 mm   |
| Weight per panel        | approx. 22 kg   |
| Dimensions              | 600 mm x 600 mm   |
| Core material           | high-density mineral gypsum fibreboard  |
| Building material class | A1/A2   |
| Edge banding            | circumferential   |
| Panel face              | surface coverings suitable for<br>raised access floors, e.g.<br>homogeneous vinyl, linoleum,<br>HPL, are installed ex works |
| Panel bottom            | Steel sheet   |

# Substructures

Optional or system-related stringers/cross bars as well as pedestal dimensions of at least M16 or to suit the required installation height.



#### Support:

Conductive pedestal support

| Statics according to EN 12825:2002 |       |  |  |
|------------------------------------|-------|--|--|
| Ultimate load                      | 10 kN |  |  |
| Working load                       | 5 kN  |  |  |
| Safety factor                      | 2,0   |  |  |
| Deflection class                   | A     |  |  |

### Fire protection according to DIN 4102-2: 1977

Fire-resistance class
F30 up to clear heights
of 1,250 mm depending on
the substructure used

| Sound insulation according to DIN EN ISO 10848 | 2018 |
|--|------|
| and EN ISO 140: 2005                           |      |

|   | without covering | with covering |
|---|------------------|---------------|
| Standard impact sound level (Ln,w)          | 63 dB            | 49-54 dB      |
| Impact sound reduction (ΔLw,P)              | 13 dB            | 21-26 dB      |
| Weighted sound reduction index (Rw)         | 61 dB            | 62-63 dB      |
| Standard edge sound difference (Dn,f,w,P)   | 50 dB            | 50 dB         |
| Standard edge impact sound level (Ln,f,w,P) | 67 dB            | 47 dB         |

#### Note:

Depending on the covering used, the sound values may differ. According to the manufacturer's specifications, the impact sound reduction resulting from the floor coverings ranges between  $\Delta Lw$ : 18–30 dB. If you require detailed information regarding the sound values, please feel free to contact the technical department.



Please scan the QR code or click <u>here</u> to go to the current product page.









## Tate Global GmbH

Zum Stadion 4, 63808 Haibach, Germany
T: +49 (0) 6021 63949-0 E: infoDE@tateglobal.com W: tateglobal.com/de



Tate Global GmbH reserves the right to amend or add to the product specifications without prior notice as part of our commitment to continuous improvements and the observance of



**PLANET**