

MAGNETIC BACKED ENGINEERED TIMBER OVERLAY


To view product details



The mark of responsible forestry

Attiro®

Innovation meets elegance, the beauty of Attiro is the simplicity with which you can create an engineered timber floor whilst retaining access to the underfloor void created. Attiro benefits from powerful magnetised strips that are bonded to the underside of the timber planks which in turn adhere to the steel encapsulated floor panels. With a genuine oak veneer available in a wide choice of finishes, you never have to compromise on style or function again.

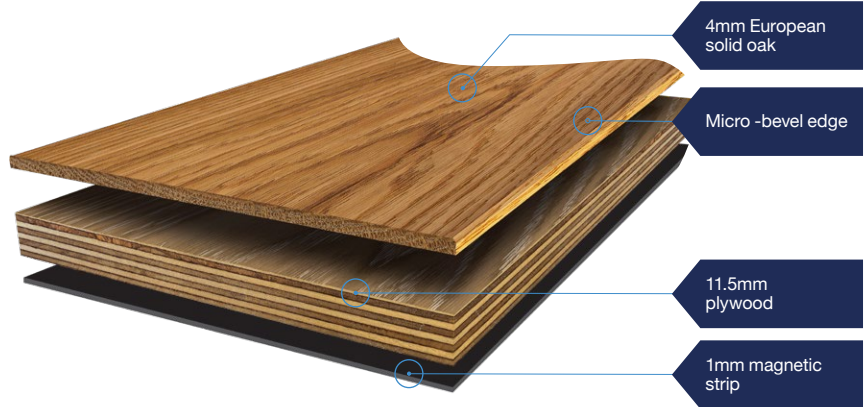

Staves	
Thickness:	16.5mm Nominal
Widths:	Between 140mm - 230mm
Lengths:	1000 - 2300mm
Surface finish ⁺ :	Hard wax oil onto 'brushed' surface
Category:	Magnetic dry lay

Performance	
Slip resistance:	Dry: >60PTV Wet: >45PTV

Magnetic Performance	
Magnet type:	Isotropic Flexible Ferrite
Wi-Fi interference:	Tested and approved
Electrical equipment:	Tested and approved incl. pacemaker & telephony devices

Panel Fire Performance	
Reaction:	EN13501:1:2018 Dfl-s1

All genuine timber floor products (including Attiro) require a relative humidity level of 40% to 60% to be maintained throughout the building.

Non-magnetic tongue-and-groove option available for areas without the raised access floor panels, i.e. screeded areas etc. for continuity of floor finish. All colour surface finishes available. Please contact Technical for dimensions.

Raised access floor interface

Tolerance: 0.75mm maximum height difference between adjacent raised access floor panels.

Designed for use with Tate access floor systems.



Expansion Joints

8mm expansion joints every 15m width and every 35-45m in length. Colour matched 8mm factory formed silicone material. 8-10mm expansion to be included for all perimeter adjustments.



Design Assist

As part of the Attiro package we offer an industry leading bespoke Design Assist service. We engage at the beginning of the project and throughout the installation to mitigate cost variances, provide accuracy, predictability and efficiency and develop a layout plan to fully realise your vision.



Surface Finishes



Tate®

Tate

Burma Drive, Hull, HU9 5SG, United Kingdom
T: +44 (0)1482 781701 E: hello.uk@tateglobal.com W: tateglobal.com

© 2024 Tate. We reserve the right to change specification or design and supply products which may differ from those described and illustrated without notice and without liability.
tate-attiro-product-data-sheet-en-gb-ie-v13

**PLANET
PASSIONATE**
#planetpassionate