


# 38B-SW

## ELEMENT CLASS 6

The Tate Solida raised access floor system consists of high-quality floor panels with a highly density chipboard core and a circumferential edge protection banding. A steel sheet is applied to the underside of the panel, which contributes to increasing the load-bearing capacity. In conjunction with an appropriately sized substructure, this raised floor system achieves the technical values described below.

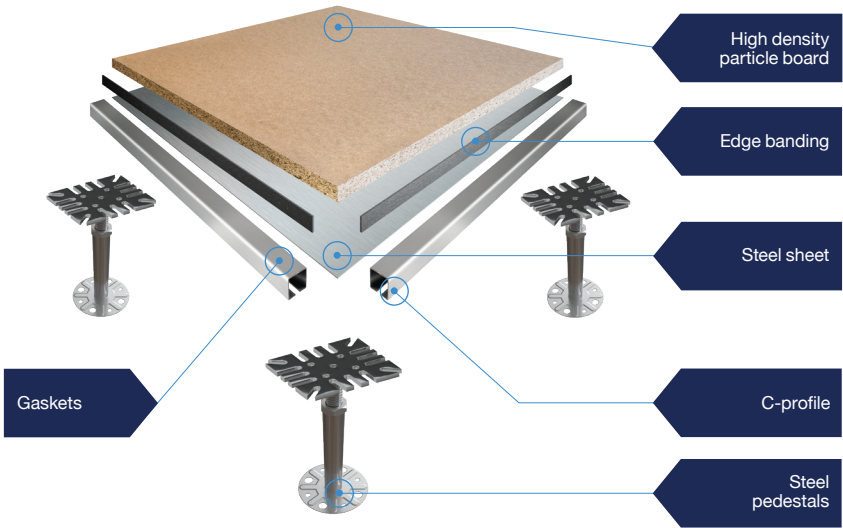


Panels	
Thickness	approx. 38,5 mm nominal
Weight per panel	12 kg
Dimensions	600 mm x 600 mm
Core material	high-density particle board
Building material class	B2 (core material)
Edge banding	circumferential
Panel face	surface coverings suitable for raised access floors, e.g. homogeneous vinyl, linoleum, HPL, are installed ex works
Panel bottom	Steel sheet

Statics according to EN 12825: 2002			
Ultimate load	12 kN	14 kN	16 kN
Working load	6 kN	7 kN	8 kN
Safety factor	2,0	2,0	2,0
Deflection class	A	B	C

Fire protection according to DIN 4102-2: 1977	
Fire-resistance class	Fire-resistant load-bearing structure up to a clear height of 1,420 mm

### Substructures

Pedestal dimensions with tube of at least 24 x 2 mm or to suit the required installation height including SSP or SSL head.

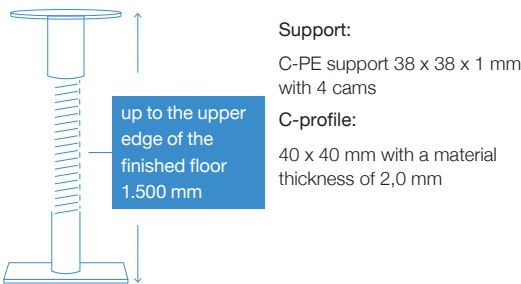

Please scan the QR code or click [here](#) to go to the current product page.



**Tate Global GmbH**  
Zum Stadion 4, 63808 Haibach, Germany  
T: +49 (0) 6021 63949-0 E: [infoDE@tateglobal.com](mailto:infoDE@tateglobal.com) W: [tateglobal.com/de](http://tateglobal.com/de)

© 2025 Tate Global GmbH.  
Tate Global GmbH reserves the right to amend or add to the product specifications without prior notice as part of our commitment to continuous improvements and the observance of legal changes.

tate-solida-38B-SW-datasheet-en-de-v2 7/2025

